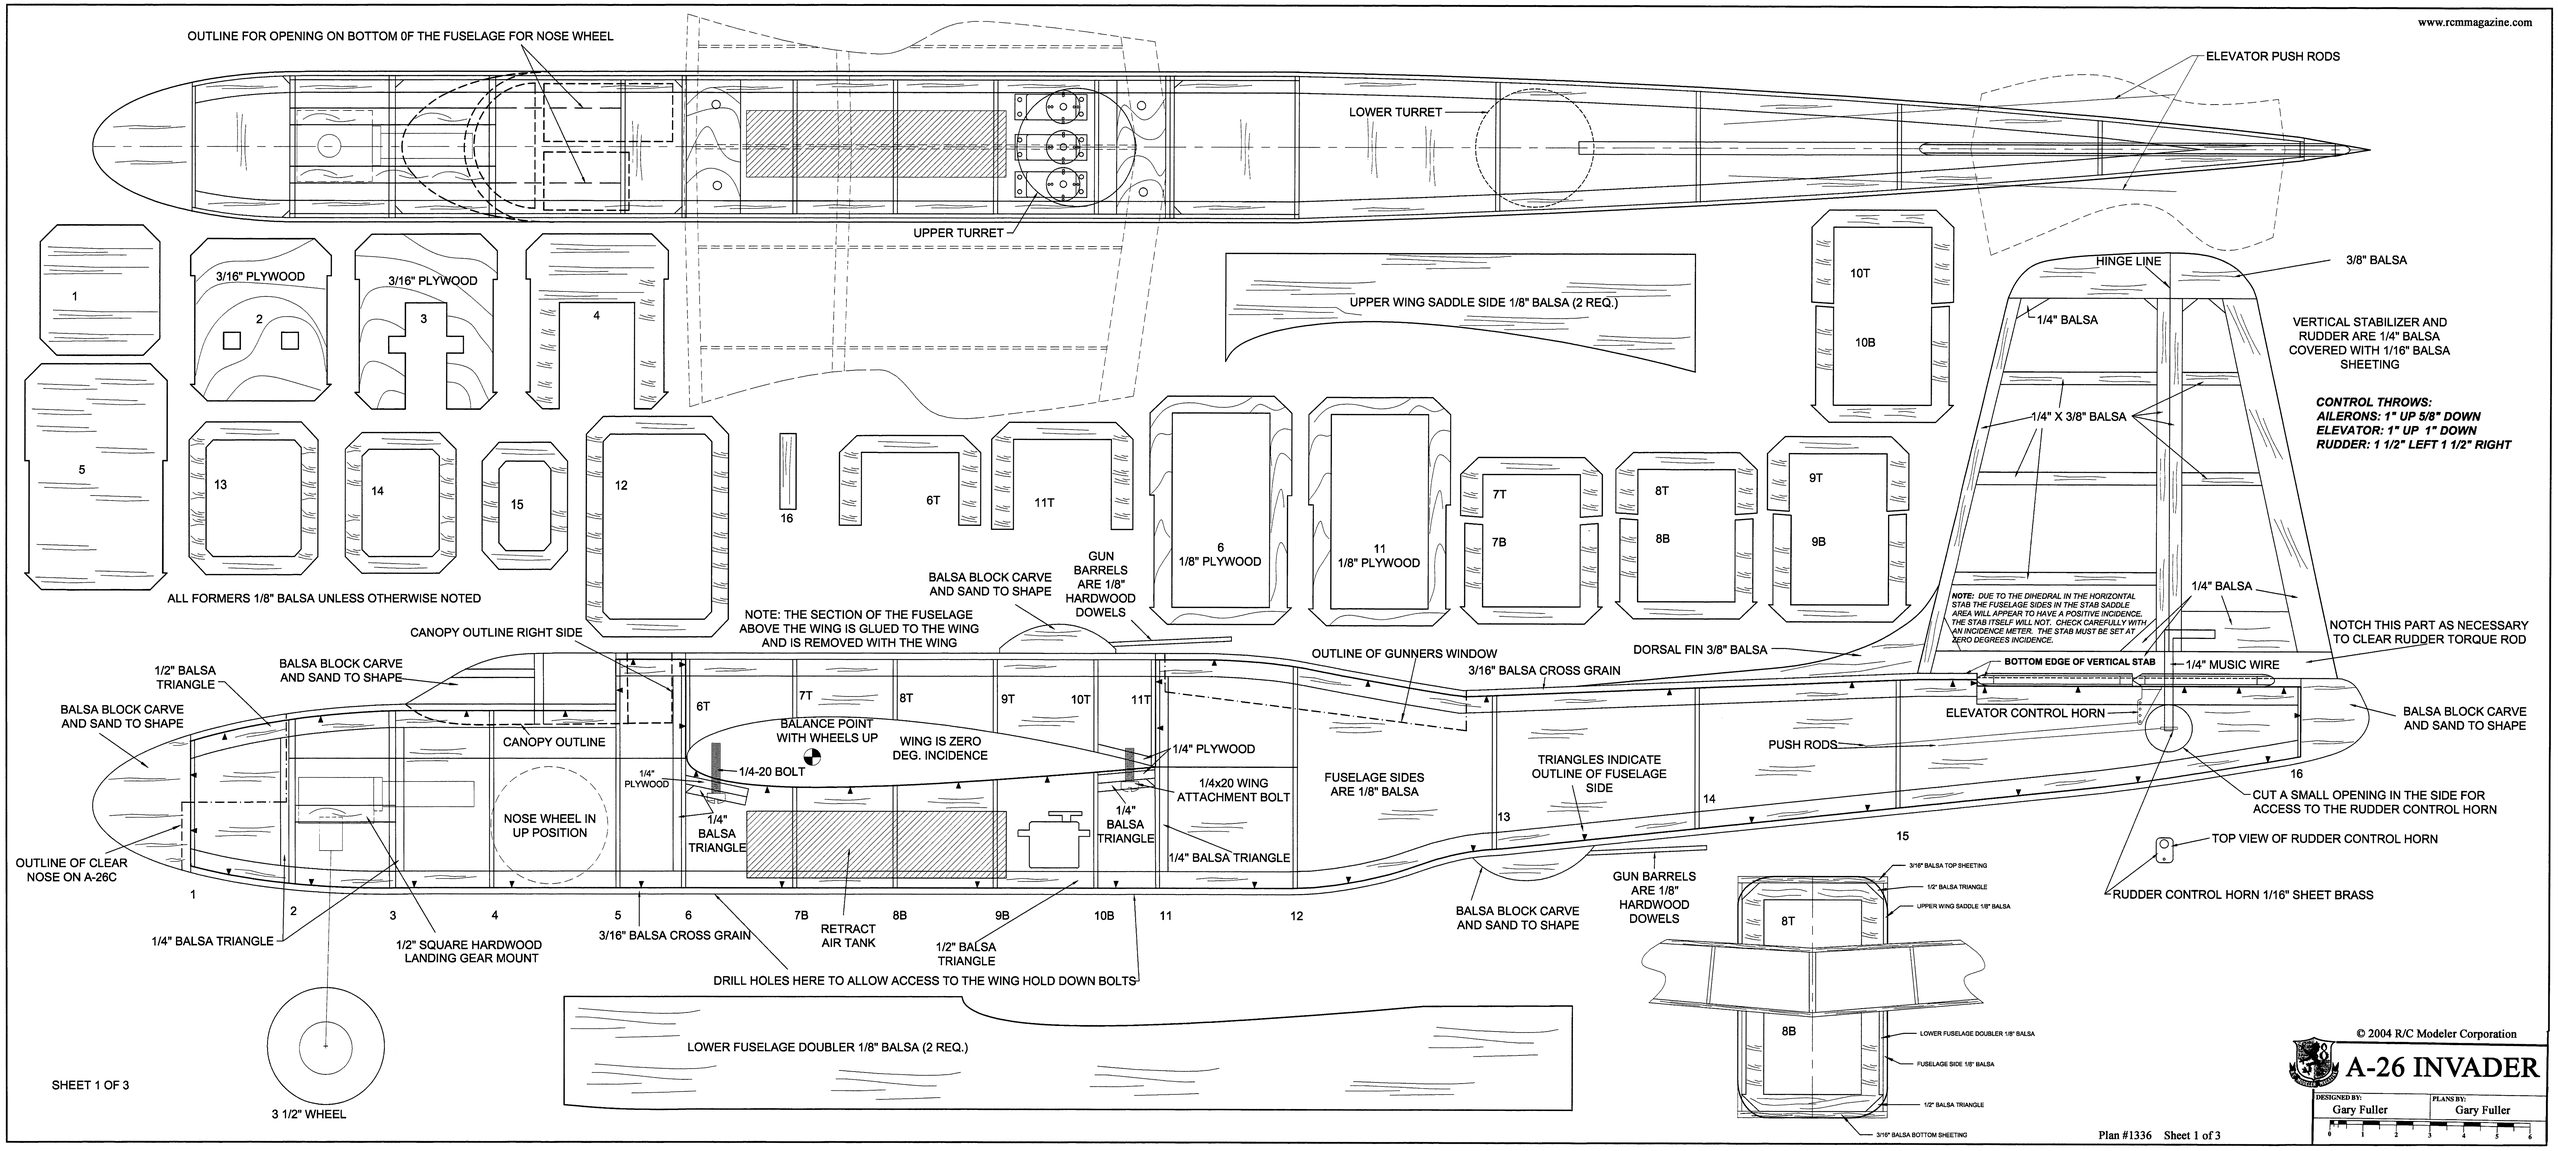

SHEET 1 OF 3

© 2004 R/C Modeler Corporation

A-26 INVADER

DESIGNED BY:	PLANS BY:
Gary Fuller	Gary Fuller

Plan #1336 Sheet 1 of 3

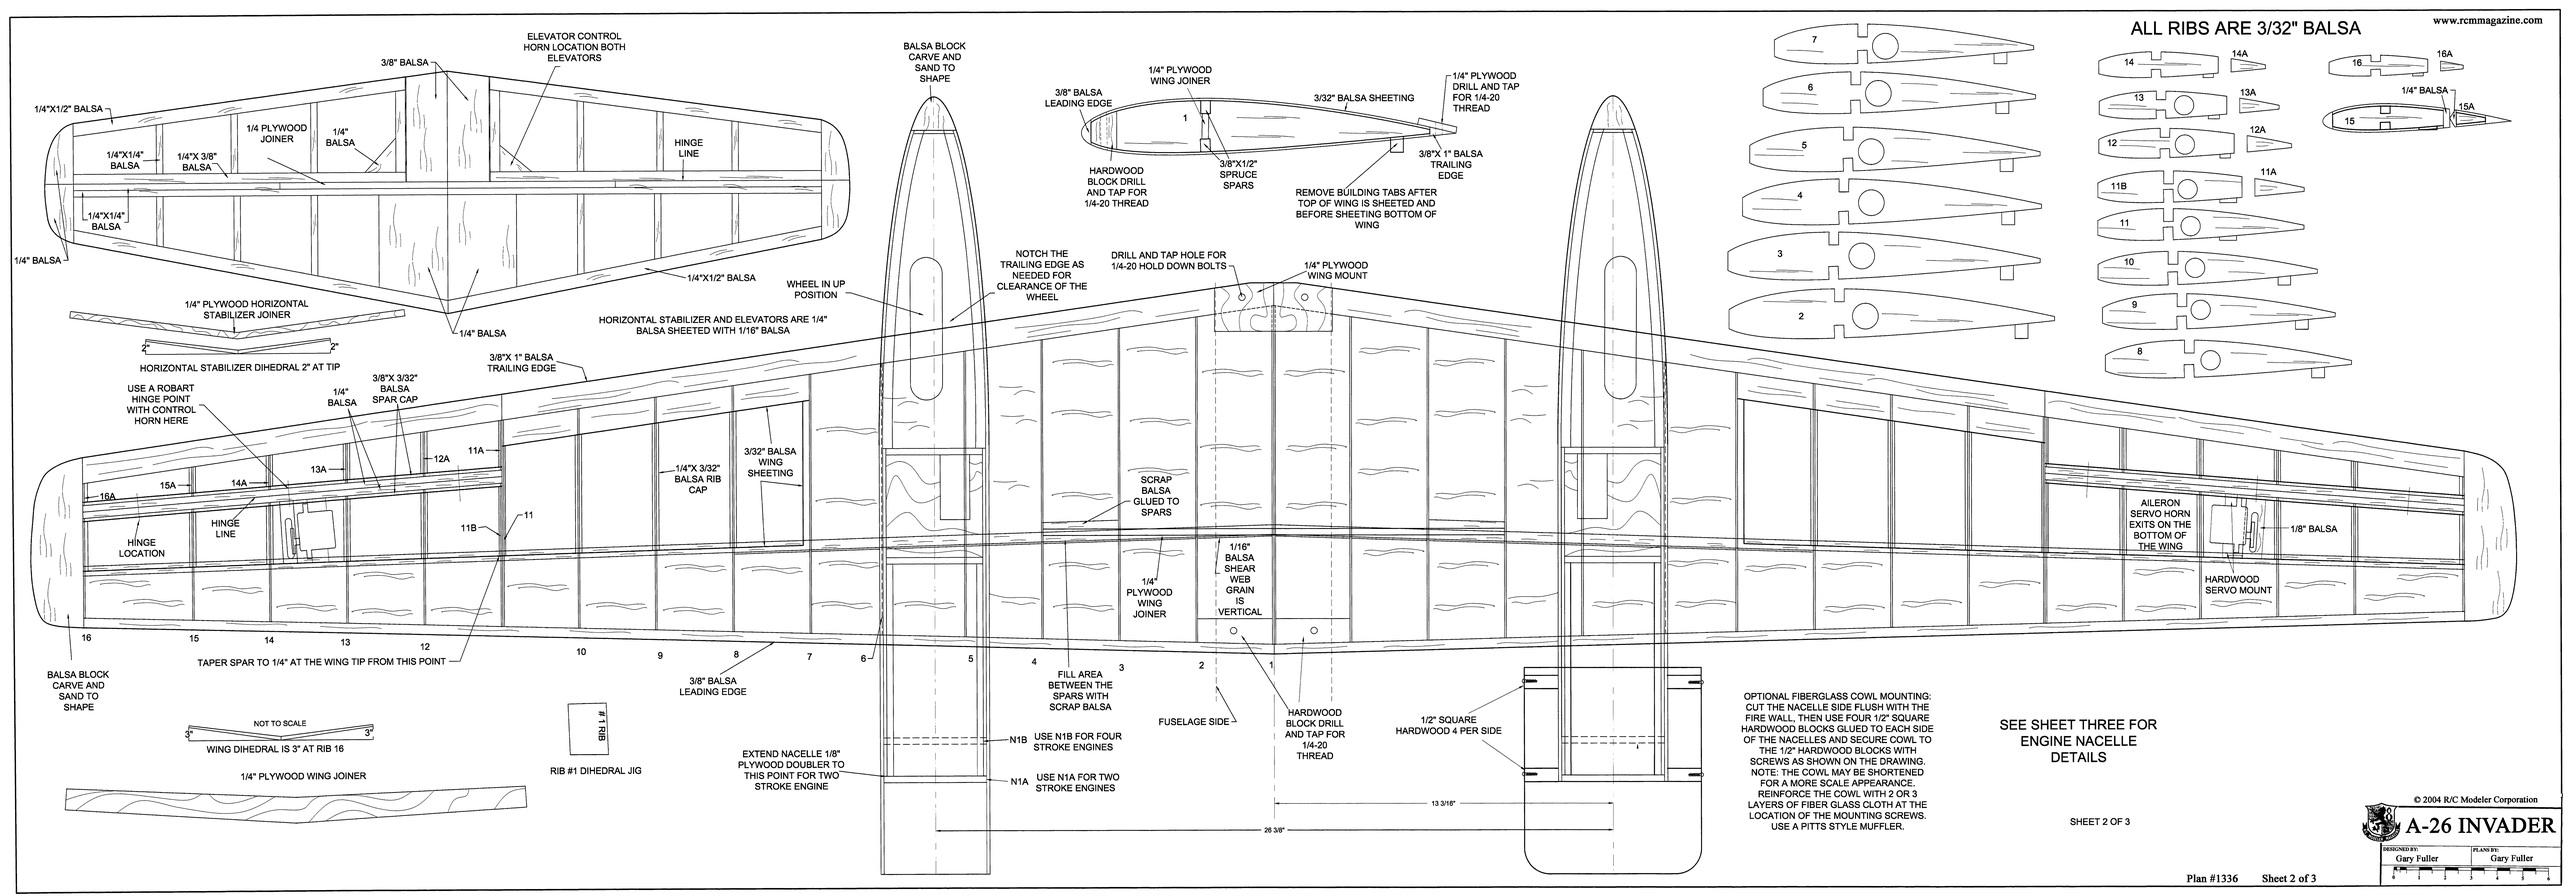

OPTIONAL FIBERGLASS COWL MOUNTING: CUT THE NACELLE SIDE FLUSH WITH THE FIRE WALL, THEN USE FOUR 1/2" SQUARE HARDWOOD BLOCKS GLUED TO EACH SIDE OF THE NACELLES AND SECURE COWL TO THE 1/2" HARDWOOD BLOCKS WITH SCREWS AS SHOWN ON THE DRAWING. NOTE: THE COWL MAY BE SHORTENED FOR A MORE SCALE APPEARANCE. REINFORCE THE COWL WITH 2 OR 3 LAYERS OF FIBER GLASS CLOTH AT THE LOCATION OF THE MOUNTING SCREWS. USE A PITTS STYLE MUFFLER.

SEE SHEET THREE FOR ENGINE NACELLE DETAILS

SHEET 2 OF 3

© 2004 R/C Modeler Corporation

A-26 INVADER

DESIGNED BY:	PLANS BY:
Gary Fuller	Gary Fuller

Plan #1336 Sheet 2 of 3

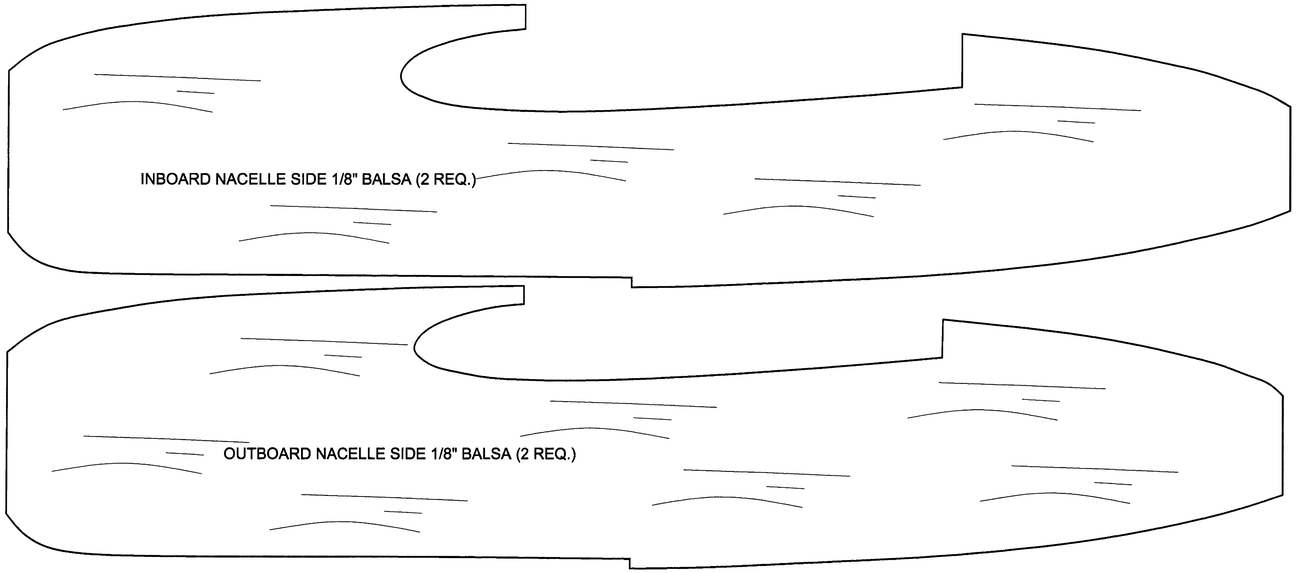





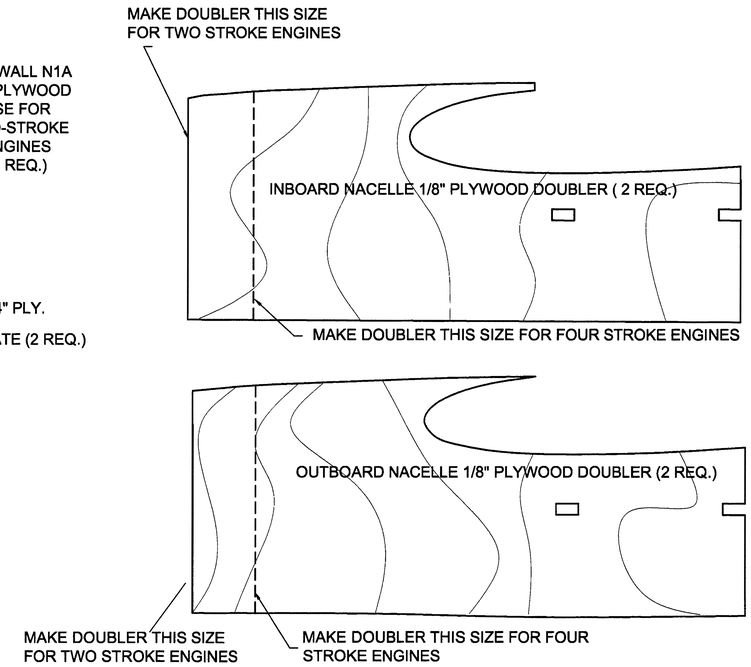

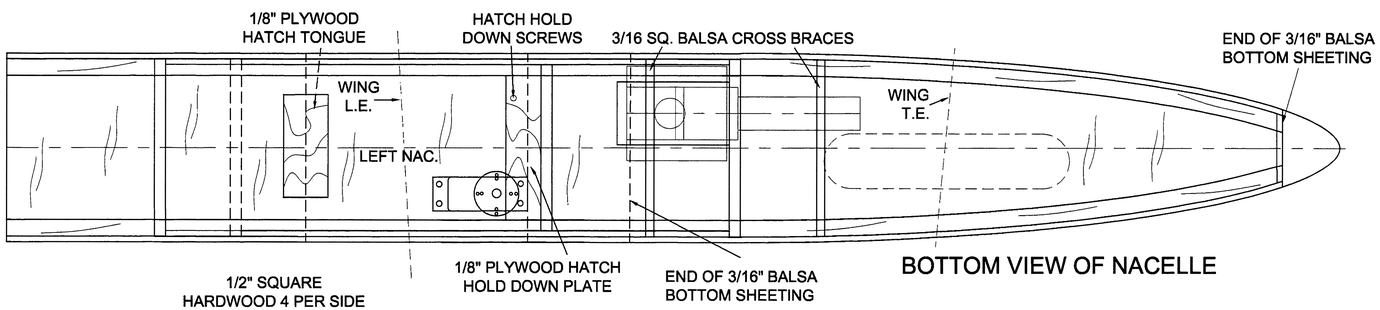

BOTTOM VIEW OF NACELLE

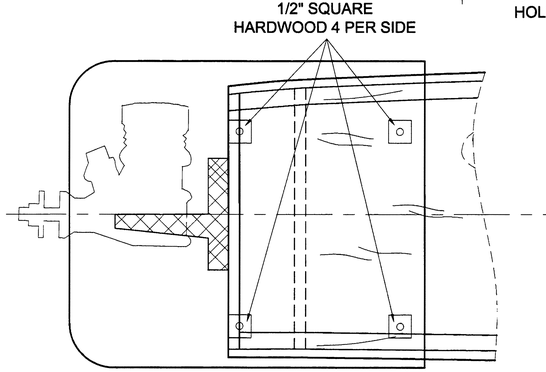

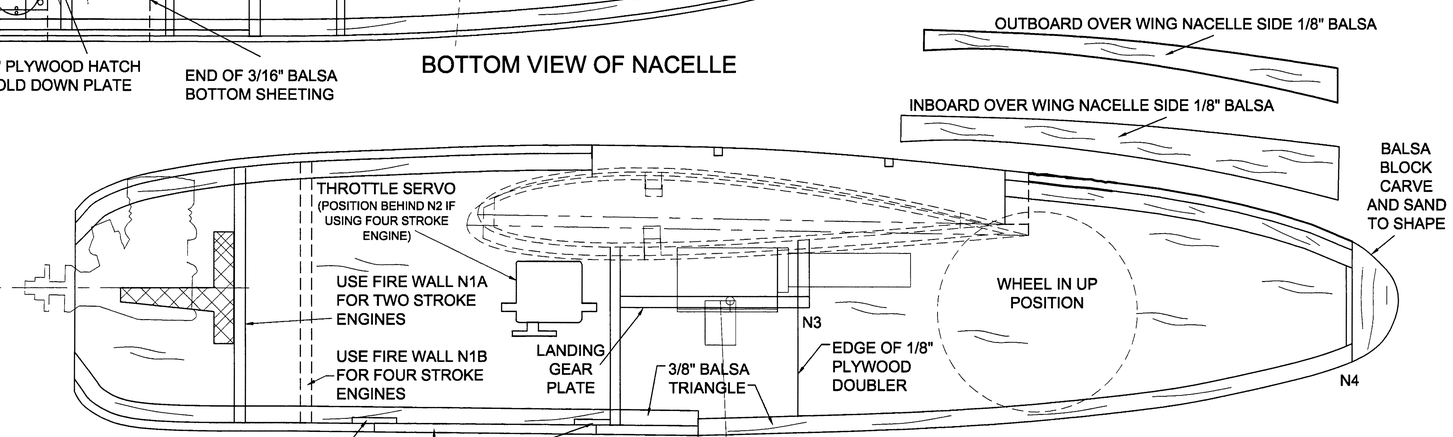

OPTIONAL FIBERGLASS COWL MOUNTING:
CUT THE NACELLE SIDE FLUSH WITH THE FIRE WALL, THEN USE FOUR 1/2" SQUARE HARDWOOD BLOCKS GLUED TO EACH SIDE OF THE NACELLES AND SECURE COWL TO THE 1/2" HARDWOOD BLOCKS WITH SCREWS AS SHOWN ON THE DRAWING. NOTE: THE COWL MAY BE SHORTENED FOR A MORE SCALE APPEARANCE. REINFORCE THE COWL WITH 2 OR 3 LAYERS OF FIBER GLASS CLOTH AT THE LOCATION OF THE MOUNTING SCREWS. USE A PITTS STYLE MUFFLER.







© 2004 R/C Modeler Corporation

A-26 INVADER

DESIGNED BY:	PLANS BY:
Gary Fuller	Gary Fuller

0 1 2 3 4 5 6