
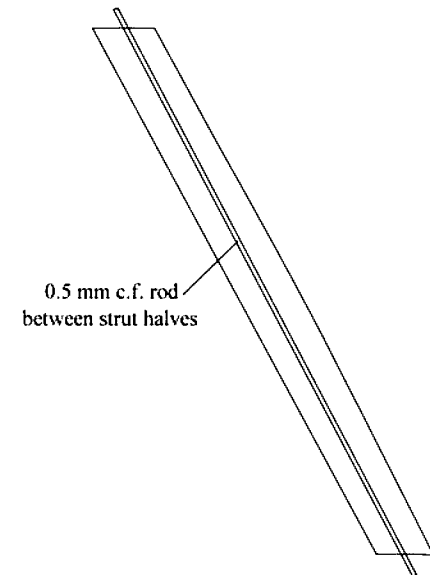



- materials**
- 0.5 mm c.f. rod - 18"  
(cs strut, i/p struts & p/rod)
  - 0.7 mm c.f. rod - 3"  
(axle)
  - brass wire - 1.5"  
(pushrod ends)
  - 1.5 mm heat shrink - 1"  
(pushrod ends)

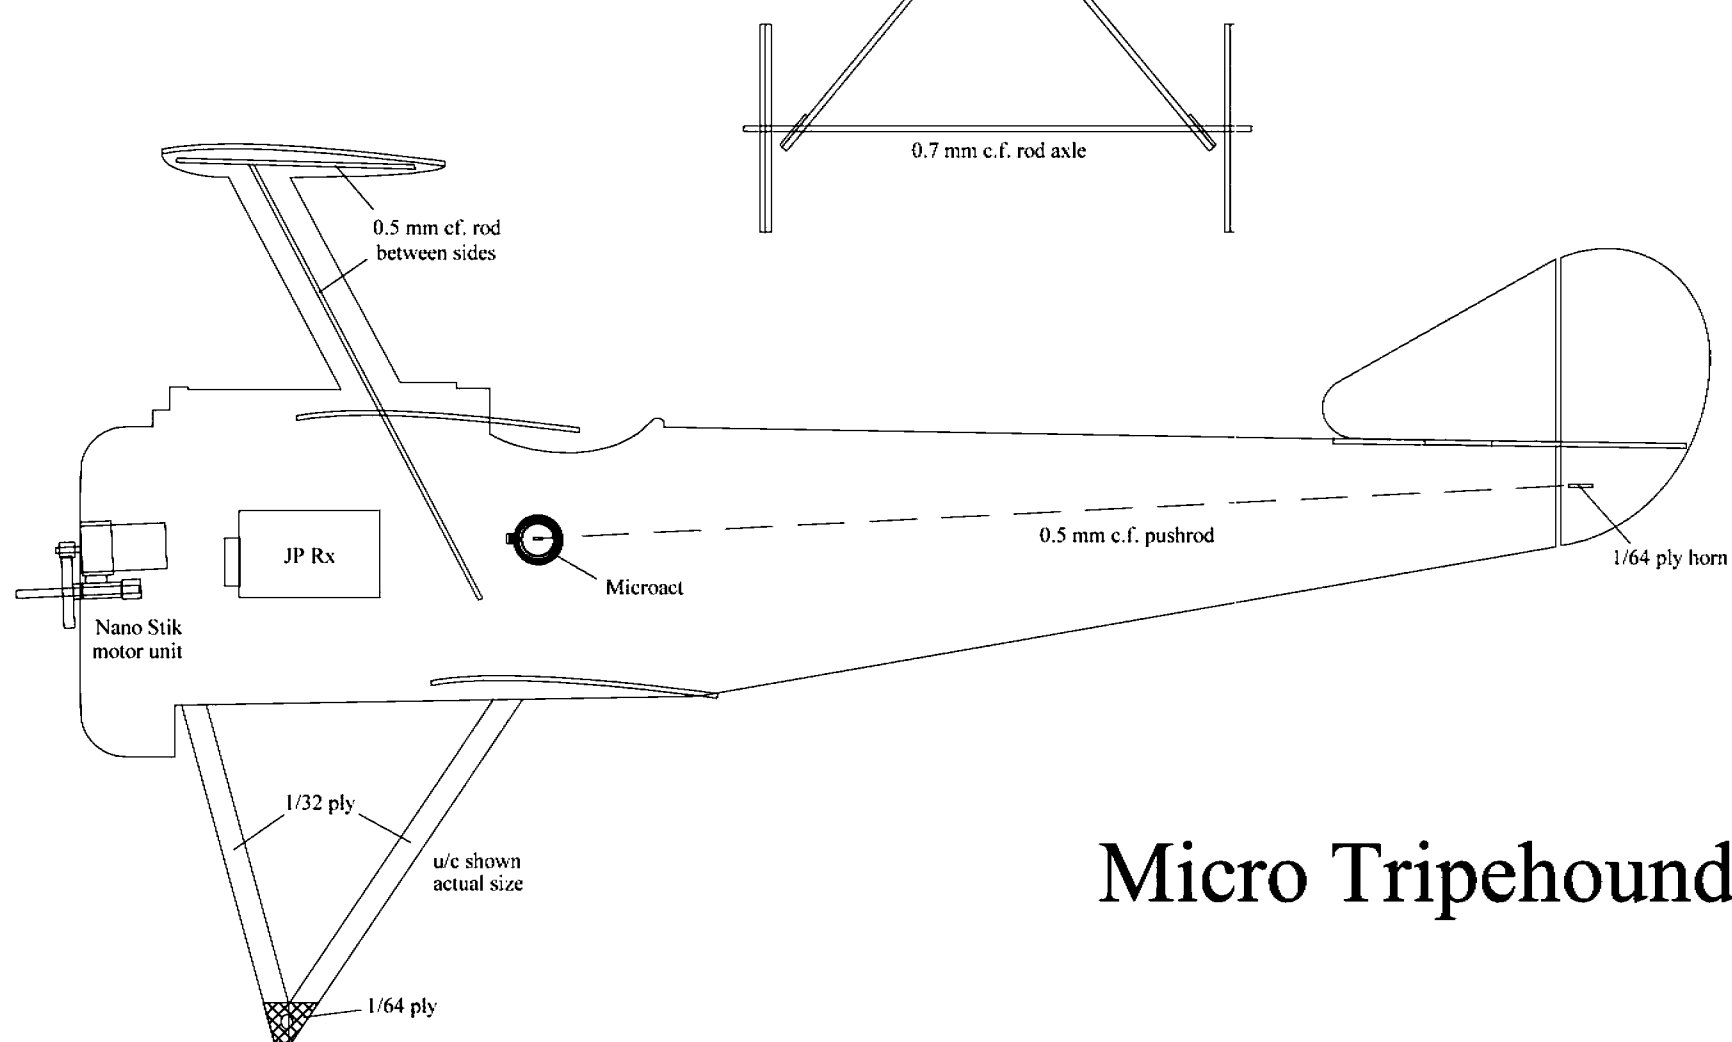

**FITTING WINGS**

- Glue top wing to platform
- Butt glue bottom wing panels to fuselage
- Glue interplane struts into middle wings
- Glue middle wings to fuselage and strut stubs into top & bot. wings

Bracket positions show angle of struts in middle wing & wing on fuselage

# Micro Tripehound