


COVERING & FINISHING
The procedure for covering the wing is the same whether using silk or silkspan. First sand the entire framework lightly with #600 finishing paper. Then apply one or two coats of clear dope, sand the entire framework gain.

lay the covering material on one wing panel (cover only one wing panel at a time) and cut out the material with about one inch margin on each side. Submerge the covering in a pan of water, then remove and place in a towel to blot the excess water. Remove from the towel and place the covering on the wing frame. Pull out all the wrinkles, then take one end and fold it half way back. Apply the covering back onto the framework and pull out all the wrinkles. Take the opposite end and follow the same procedure. After the water has dried apply enough clear dope to achieve a high gloss finish.

There are other covering materials available. If you choose any of them, follow the manufacturer's instructions.

TRY MICROLON AVAILABLE AT YOUR LOCAL HOBBY DEALER

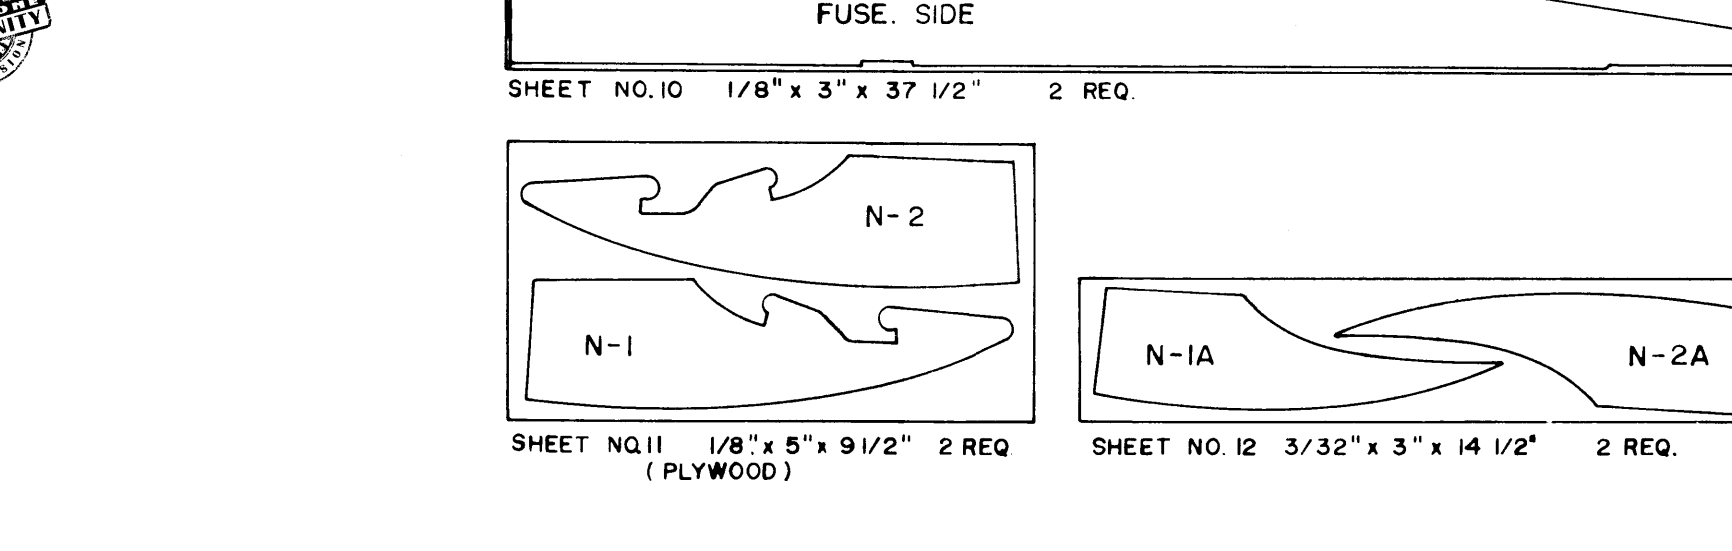

BECOME A LICENSED FLYER JOIN THE A.M.A. WRITE A.M.A. HEADQUARTERS 806 18th STREET N.W. WASHINGTON, D.C. 20005

"Twin Stik" KIT #145
TWIN ENGINE MULTI CHANNEL TRAINER AND SPORT FLYER
Wing Span 54" Wing Area 600 Sq. In. Engines 19 to 30 cu. in.
DESIGNED BY: FRANK GARCHER & R.J. BARBOSA KIT PRODUCTION ED. ROGALA
PROTOTYPE MODEL BY: R.J. BARBOSA
PLANS BY: DON HARDY, Y. MICHA & JIM NEWMAN APPROVED BY: FRANK GARCHER, PRES.